





Key Features

- ▶ Manufactured in white polycarbonate with incorporated heatsink and control gear
- ▶ Available in 15w and 25w variants
- ▶ Lumen outputs of 1,575 lm (15w) and 2,625 lm (25w)
- ▶ Choice of 3000k or 4000k
- ▶ CRI >80
- ▶ 90 degree beam angle
- ▶ UGR <19
- ▶ 105 lm/w
- ▶ DALI dimming and emergency options available
- ▶ Dimensions - 15w (192mm x 89mm)
 - 25w (228mm x 94mm)
- ▶ Cut out size - 15w (150mm diameter x 175mm)
 - 25w (185mm diameter x 210mm)

Allow 30mm air gap above fixture

Dimensions

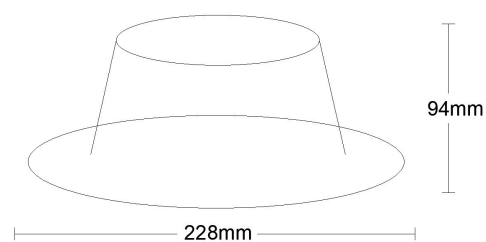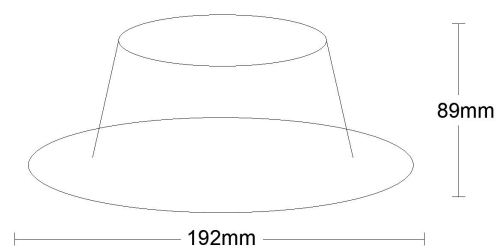

www.swannlighting.co.uk

Follow us on Twitter @SwannLighting

Tel : 01522 300202

