

# Asterius Datasheet

SWANN  
LIGHTING



## Key Features

- ▶ Manufactured in an aluminium body finished in white, black or silver
- ▶ Suitable for retail, hospitality and office areas
- ▶ Lumen output of up to 11,000 lm
- ▶ 4000K CCT as standard
- ▶ 4 beam optics which include 30° narrow beam, 60° medium beam, 90° wide beam and 2x24° shelf beam
- ▶ RA>80 (90 available upon request)
- ▶ Up to 150 lm/w
- ▶ 1-10V and DALI control
- ▶ Available as emergency

## Site Image



# Asterius Datasheet



## Product Codes

Codes	Wattage	Lumens	Beam Angle	CCT	Dimensions
SLL/ASTERIUS/30/3900/NB/4K/577	30w	3900 lm	Narrow beam (30°)	4000K	577mm x 70.5mm x 86mm
SLL/ASTERIUS/30/3900/MB/4K/577	30w	3900 lm	Medium beam (60°)	4000K	577mm x 70.5mm x 86mm
SLL/ASTERIUS/30/3900/WB/4K/577	30w	3900 lm	Wide beam (90°)	4000K	577mm x 70.5mm x 86mm
SLL/ASTERIUS/30/3900/DB/4K/577	30w	3900 lm	Diffused beam (110°)	4000K	577mm x 70.5mm x 86mm
SLL/ASTERIUS/30/3900/SB/4K/577	30w	3900 lm	Shelf beam (2x24°)	4000K	577mm x 70.5mm x 86mm
SLL/ASTERIUS/60/7600/NB/4K/1149	60w	7600 lm	Narrow Beam (30°)	4000K	1149mm x 70.5mm x 86mm
SLL/ASTERIUS/60/7600/MB/4K/1149	60w	7600 lm	Medium Beam (60°)	4000K	1149mm x 70.5mm x 86mm
SLL/ASTERIUS/60/7600/WB/4K/1149	60w	7600 lm	Wide Beam (90°)	4000K	1149mm x 70.5mm x 86mm
SLL/ASTERIUS/60/7600/DB/4K/1149	60w	7600 lm	Diffused Beam (90°)	4000K	1149mm x 70.5mm x 86mm
SLL/ASTERIUS/60/7600/SB/4K/1149	60w	7600 lm	Shelf Beam (2x24°)	4000K	1149mm x 70.5mm x 86mm
SLL/ASTERIUS/75/9500/NB/4K/1435	75w	9500 lm	Narrow beam (30°)	4000K	1435mm x 70.5mm x 86mm
SLL/ASTERIUS/75/9500/MB/4K/1435	75w	9500 lm	Medium beam (60°)	4000K	1435mm x 70.5mm x 86mm
SLL/ASTERIUS/75/9500/WB/4K/1435	75w	9500 lm	Wide beam (90°)	4000K	1435mm x 70.5mm x 86mm
SLL/ASTERIUS/75/9500/DB/4K/1435	75w	9500 lm	Diffused beam (110°)	4000K	1435mm x 70.5mm x 86mm
SLL/ASTERIUS/75/9500/SB/4K/1435	75w	9500 lm	Shelf beam (2x24°)	4000K	1435mm x 70.5mm x 86mm

\*Notes - lumens will vary depending on beam angle\*

## Additional Coding

<b>DALI</b>	Touch dimming/DALI
<b>EMG</b>	Emergency
<b>W/B/S</b>	White/black/silver finish
<b>3K/5K/6K</b>	3000K/5000K/6000K CCT

# Asterius Datasheet



## Accessory Codes

### Asterius Blank



Length		Colour	
Code	Part	Code	Colour
577	577mm blanking plate	W	White
1149	1149mm blanking plate	B	Black
1435	1435mm blanking plate	S	Silver

### Node Connector



Type		Colour	
Code	Part	Code	Colour
L	L-connector	W	White
T	T-connector	B	Black
X	X-connector	S	Silver

# Asterius Datasheet




## End Caps



Type		Colour	
Code	Part	Code	Colour
ECL	End cap lens (30°, 60°, 90° & 2x24°)	W	White
ECP	End cap PC cover (110°)	B	Black
-	-	S	Silver

## Dimensions

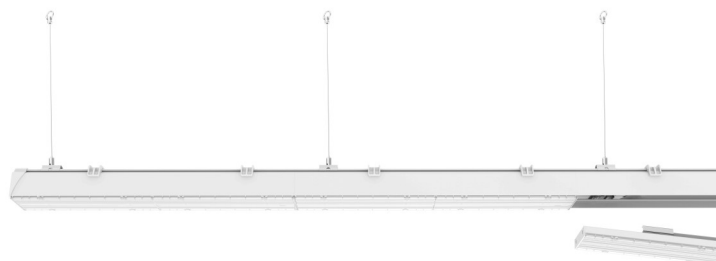

Asterius 60° trunking

[www.swannlighting.co.uk](http://www.swannlighting.co.uk)

Follow us on Twitter @SwannLighting

Tel : 01522 300202



All luminaires comply with CIBSE Lighting Guide and are designed and manufactured to conform to the general requirements of BS4533. A stringent quality control operation in accordance with ISO 9001 ensures customer satisfaction. All luminaires are accredited with the CE mark.